



	0 x 0 2010	/ totion Bui						
	Stock Code	Size	Bar Code	Package Type	Width cm	Height cm	List Price €	100 m
3	EP12BVGC	½" C x C	5 3 9 1 2 6 9 6 4 5 3 7 4	Card	12	15.5	10.04	
<u> </u>	EP34BVGC	¾" C x C	5 3 9 1 2 6 9 6 4 5 3 8 1	Card	12	15.5	13.98	A CONTRACT
Ð								Chine Barris



d	Wall M	ounted G N.G & L	as Valve	for			
19 19 19	Stock Code	Siz			M	17	
	EP810GV	/W 8m	m x 10mm	า			
	Package Type	Width cm	Height cm	List Price €	1.	THE REAL PROPERTY AND A	
	Card	18	25.5	22.56			-3
	5 3 9	12696	4 5 1 2 1				



Mini C x C Lever Action Ball Valve

C x C Lever Action Ball Valve

Stock Code	Description	Bar Code	Package Type	Width cm	Height cm	List Price €
EP8GC	8mm	5 3 9 1 2 6 9 6 4 5 0 6 0	Card	9	12	9.58
EP10GC	10mm	5 3 9 1 2 6 9 6 4 5 0 7 7	Card	9	12	9.58
EP108GC	10mm x 8mm	5 3 9 1 2 6 9 6 4 5 0 9 1	Card	9	12	9.58
EP15GC	15mm	5 3 9 1 2 6 9 6 4 5 0 8 4	Card	9	12	10.74
EP158GC	15mm x 8mm	5 3 9 1 2 6 9 6 4 5 1 0 7	Card	9	12	10.74
EP1510GC	15mm x 10mm	5 3 9 1 2 6 9 6 4 5 1 1 4	Card	9	12	10.74



Easi		PTFE Join Ribbon
GA	S	Suitable for use with fittings conveying LPG and Natural Gas
Parts & Accessories	3	
Specification Untimized shelf life and sublishing at one dependent		
and threaded Attings Overscally seistent to meet known chemicals, fluids, elis, solvents, cases and acids.		
Stable in a temperature single tetrater - 200 to + 2407C, Does not melt burn		Tredito
drip, dissolve, leach, handen ar become brittle.		
Normains soft and plant for lifetime, and is completely inert, non-hazandous and non-flammable.	Texarille	and the second s
Apprenals UL load seal material to 28DZ, File No.	In condition	Instructions
MH3E034, where not exceeding the pipe diameter and used with prepare, indexe and relativeliate and		Start at the exposed and a the thread and wind the Risban in the direction of the thread white
pressure does not exceed 100 pel. (5.9 ber), 150 9062 Contilled	Agriculture of the second	everlapping frequently. Use sufficient to be able to
INRAS listed and approved by UK Water Advisory Echeme (85 8027)	Service and a service of the	acrew the thread into the formale fitting with a wrenc or operator, such that it only atarts to become tight
Dertificate No. 0387585. Teat Report No. MA27834E B R 45	a	engages in the fitting. 150 metres
		100 medica

PTFE Tape (Gas Approved)						
Stock Code	Description 5m Tape For Gas					
EPPERGT						
Package Type	Width cm	Height cm	List Price €			
Card	9	12	2.40			
5 3 9 1	2696	22337				

P.T.F.E. Ribbon for Gas								
Stock Code	Des	Description						
EPTHTITE	E 150	150M Can Threadtite						
	Rib	Ribbon for Gas						
Package	Width	Height	List					
Туре	cm	cm	Price €					
Card	12	12 15.5						
5 3 9	12697	13257						

PTFE (Polytetrafluoroethylene) has been around for many years, but only as a jointing tape for the last two decades or so. Its very low coefficient of friction and melting point of about 320°C, makes it an ideal substitute for hemp and jointing paste. Apply the tape winding it around the thread in the opposite direction to that used to insert the thread into the fitting. Again, experience will determine how much tape to apply, which should be sufficient to be able to screw the thread into the female fitting with a wrench or spanner such that it only really starts to become tight as most of the thread is engaged in the fitting.



Instructions

Start at the exposed end of the thread and wind the Ribbon in the direction of the thread, whilst overlapping frequently.

Use sufficient to be able to screw the thread into the female fitting with a wrench or spanner, such that it only starts to become tight as most of the thread engages in the fitting.





127

Gas Valves & Sealants



Hose Union Nozzle Male

1.2m Orange hose (8mm internal diameter)								
Stock Code	Description		1					
EP2MGH	Rubber Gas Hose (BS3212)							
Package Type	Width cm		I					
Card	25.5		1					
Height cm I	List Price €	N	(
37	7.50	7	(
5 3 9 1 2 6	9 645282		8 () 1					



List Price € 9.50 5 3 9 1 2 6 9 6 4 5 3 2 9

Non-flammable

GAS LEAK DETECTOR SPRAY is a specially formulated micro porous foam designed specifically to identify even the smallest positive pressure gaseous leak. It is suitable for use with most gases and is compatible with paintwork, metals, wood and most plastics.






ion zzle	Stock Code	Size	Bar Code	Package Type	Width cm	Height cm	List Price €	
Male pered Thread	EP18HUN	1⁄8"	5 3 9 1 2 6 9 6 4 5 3 3 6	Card	9	12	3.74	
	EP14HUN	1⁄4"	5 391269 645343	Card	9	12	3.74	
internal ter hose 3 3212	EP38HUN	³ ⁄8"	5 1 3 9 1 2 6 9 6 4 5 3 5 0	Card	9	12	3.74	
and se Clip	EP12HUN	1⁄2"	5 3 9 1 2 6 9 6 4 5 3 6 7	Card	9	12	3.74	
	Hose Unio	n Nozzla	Fomalo					




Easi

GAS

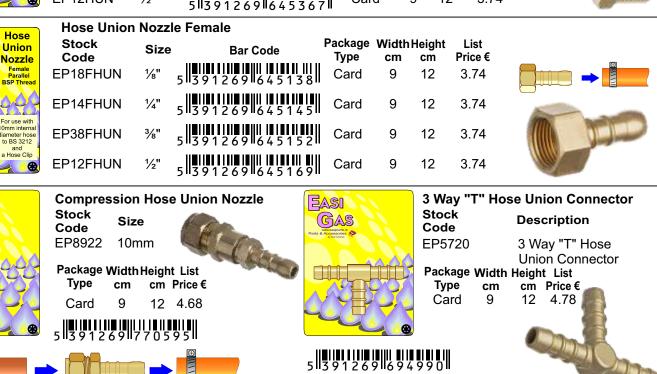



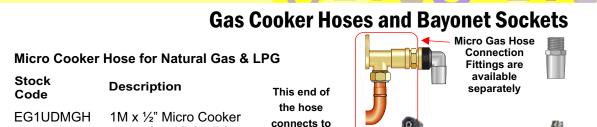

the 1/2" BSP

thread on the

gas appliance

15500

Hose for NG & LPG

List


Price €

31.90

Height

cm

37



Appli

Easi GAS Package

Туре

Card

Width

cm


25.5

		5 39	0 1 2 6 9 1 7 6	 6475			
ocket Plate	Plug in	Socket	& Back Pla	ate for M	icro Gas H	ose	Assemble this joint with either PTFE tape, or use
Hose	Stock Code		Descriptio	on	Bay	ects with the onet fitting icro Hose	Sealtite Thread Sealant
	EPMPI	S	Plug in Socket & Back Plate for Micro ga				
sion	Package Width Height List Type cm cm Price€						
æ	Card	12 2 6 9 6	15.5 15.76		ti	Use substantial fixings to secure he plate in position	¹ / ₂ " Compression Fitting for Gas Supply
Gas liance l		Standar	d Cooker H	lose for	Natural Ga	s LPG	Std. Gas Hose Connection Fittings are
ble for use with: Gas LPG Hose length 900mm 1200mm		Stock Code	D	escriptio	on		available separately
onnection Fittings	E E	EG1UD0			tandard Co NG &LPG	oker This end of	
	//	Package Type	Width cm	Height cm	List Price €	the hose connects to the 1/2" BSP	Harrison H
		Card	25.5	37	30.28	thread on the gas appliance	. 👗 🥻
	B	5 3	0 1 2 6 9 7 6	 6 4 6 8			




Easi

GAS

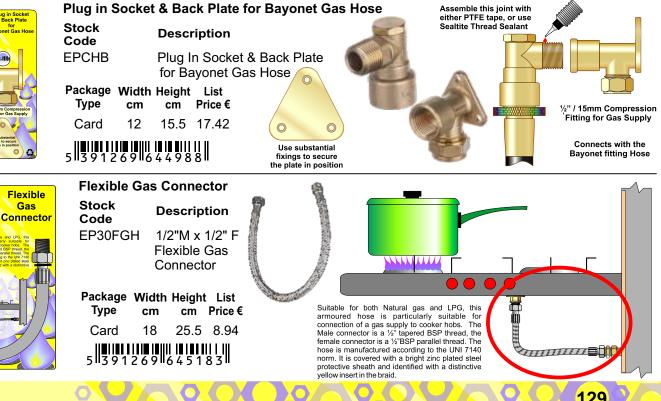

129

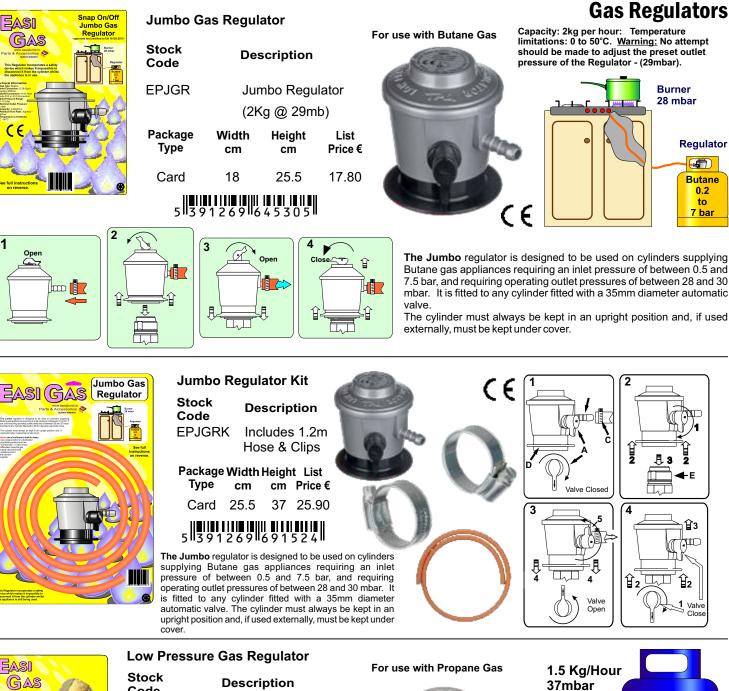



1

	Low Press	ure Gas	For use with Propane Ga		
	Stock Code	Des	scription		For use with Fropane Gas
0	EP1KGRP		igle Regul 5 Kg @ 37		
	Package Type	Width cm	Height cm	List Price €	
-	Card	12	15.5	16.70	
Ð	5 1 1 5 391	26916	45404		Minimum inlet pressure: 1 bar Maximum inlet pressure: 16 bar



Low Pressure Clip on LP Gas **Regulator with Safety Interlock**

Stock Description Code EP27REG 27mm Clip on Regulator (1.5Kg @ 37mb) Package Width Height List Type cm Price€ cm 25.5 14.86 Card 18 5 || **3** 9 1 2 6 9 || 6 9 5 3 5 5 || ϵ

This Valve is a low pressure regulator with a set outlet pressure of 37mbar and capacity of 1.5kg/hr conforming to European standard BS EN 12864. No attempt should be made to adjust this setting. It must only be used with propane gas. This regulator is

designed to only fit on a 27mm 'Clip On' type cylinder valve. If you have any problems connecting the regulator to your cylinder, contact your local gas supplier at once.

CE Fia.

Standard Regulator



PROPANE

Burner 28 mbar

Regulator

Butane 0.2

to

7 bar

∎-F

€3 , T

₽2

PROPANE

Valve

₽2

